

Prepared to U.S. OSHA, Mexico NOM-018-STPS-2015, Canadian WHMIS Standards, Australian WorkSafe, Japanese Industrial Standard JIS Z 7250:2000, and European Directives

1. PRODUCT IDENTIFICATION

1.1 TRADE NAME (AS LABELED):

SYNONYMS:

CAS#:

PRODUCT #:

1.2 PRODUCT USE:

CHEMICAL SHIPPING NAME/CLASS:

U.N. NUMBER:

1.3 NORTH AMERICA:

MANUFACTURER'S NAME:

ADDRESS:

BUSINESS PHONE:

EMERGENCY PHONE:

DATE OF CURRENT REVISION:

DATE OF LAST REVISION:

Bright Red

Pigment additive

Mixture

FC6-601 (Bulk), FC6-601PT (pint)

Color Additive

See Section 14

See Section 14

Florock Polymer Flooring

1120 W Exchange, Chicago IL, 60609 USA

1-773-376-7132

800-424-9300 (Chemtrec U.S. – 24 Hrs)

1-703-537-3887 (Chemtrec Europe – 24 Hrs)

February 17, 2021

New

2. HAZARD IDENTIFICATION

EMERGENCY OVERVIEW: This product is a red liquid with a slight ester-like odor.

Health Hazards: Exposure may cause irritation to eyes, respiratory system and skin. May be harmful if swallowed.

Flammability Hazards: This product is a combustible liquid with a flash point of ~186°F (85°C).

Reactivity Hazards: None known

Environmental Hazards: The Environmental effects of this product have not been investigated. Release of this product is not expected to have significant adverse effects in the aquatic environment.

2.1 EU LABELING AND CLASSIFICATION:

This product does meet the definition of a hazardous substance or preparation as defined by 29 CFR 1910. 1200 AND the European Union Council Directives 67/548/EEC, 1999/45/EC, 1272/2008/EC and subsequent Directives.

EU HAZARD CLASSIFICATION OF INGREDIENTS:

Index Number:

EC# 204-658-1 Annex VI Index# 607-025-00-1

EC# 203-603-9 Annex VI Index# 607-195-00-7

EC# 265-199-0 Annex VI Index# 649-356-00-4

EC# 201-158-5 Annex VI Index# 603-127-00-5

Remaining components are not listed in Annex VI

Substances not listed either individually or in group entries must be self-classified.

Component(s) Contributing to Classification(s)

See Section 3

2.2 LABEL ELEMENTS:

GHS Hazard Symbols:



Signal Word: Danger!

GHS Hazard Classification(s):

Flammable Liquid Category 4

Acute Oral Toxicity Category 4

Skin Irritant Category 2

Eye Irritant Category 2

Germ Cell Mutagenicity Category 1

Carcinogenicity Category 1

Reproductive Toxicity Category 2

Specific Target Organ Toxicity – Single Exposure Category 3 (Respiratory Irritation)

Hazard Statement(s):

H227: Combustible liquid
H302: Harmful if swallowed
H315: Causes skin irritation
H319: Causes serious eye irritation
H340: May cause genetic defects
H350: May cause cancer
H361: Suspected of damaging fertility or the unborn child
H335: May cause respiratory irritation

Prevention Statement(s):

P201: Obtain special instructions before use.
P202: Do not handle until all safety precautions have been read and understood.
P210: Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
P261: Avoid breathing dust/fume/vapor/mist/spray.
P264: Wash thoroughly after handling.
P270: Do not eat, drink or smoke when using this product.
P271: Use only outdoors or in a well-ventilated area.
P280: Wear protective gloves/protective clothing/eye protection/face protection

Response Phrases:

P370+P378: In case of fire: Use media listed in Section 5 to extinguish.
P301+P312: IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell.
P330: Rinse mouth.
P302+P352: IF ON SKIN: Wash with plenty of water.
P321: Specific Treatment (See Section 4 of this SDS).
P332+P313: If skin irritation occurs: Get medical advice/attention.
P362+P364: Take off contaminated clothing and wash it before reuse.
P305+P351+P338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337+P313: If eye irritation persists: Get medical advice/attention.
P304+P340: IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P312: Call a POISON CENTER/doctor if you feel unwell.

Storage Phrases:

P405: Store locked up.
P403+P233: Store in a well-ventilated place. Keep container tightly closed.

Disposal Phrases:

P501: Dispose of contents/container in accordance with local/regional/national/international regulations.

2.3 HEALTH HAZARDS OR RISKS FROM EXPOSURE:

SYMPTOMS OF OVEREXPOSURE BY ROUTE OF EXPOSURE: The most significant routes of overexposure for this product are by contact with skin or eyes, inhalation and ingestion. The symptoms of overexposure are described below.

ACUTE:

INHALATION: Inhalation of vapors or mists in high concentrations may cause respiratory irritation.

CONTACT WITH SKIN: Contact may cause irritation.

EYE CONTACT: Liquids, vapors, or mists are irritating to the eyes and can cause stinging or tearing.

INGESTION: Ingestion may cause irritation of the gastrointestinal tract and gastrointestinal discomfort with any or all of the following symptoms: nausea, vomiting or diarrhea.

CHRONIC: This product contains chemicals which are reported to be germ cell mutagen and carcinogen hazards.

TARGET ORGANS: **Acute:** Skin, Respiratory System and Eyes **Chronic:** Organs

3. COMPOSITION AND INFORMATION ON INGREDIENTS

Hazardous Ingredients:	WT%	CAS#	EINECS #	Hazard Classification
Modified Alkyd Resin	30-60%	Proprietary	Proprietary	STOT SE 3 (Respiratory system), Skin Irritant Category 2, Eye Irritant Category 2
Dipropylene Glycol Methyl Ether Acetate	10-20%	88917-22-0	406-880-6	Acute Toxicity Cat 4 (Oral), Skin Irritation Cat 2, Eye Irritation Category 2A, Flammable Liquid Cat 4
n-Butyl Acetate	1-5%	123-86-4	204-658-1	Flammable Liquid Category 3, STOT SE 3 (Respiratory system)
Propylene Glycol Monomethyl Ether Acetate	1-3%	108-65-6	203-603-9	Flammable Liquid Category 3
Aromatic Petroleum Distillate	1-3%	64742-95-6	265-199-0	Aspiration Toxicity Cat 1, Mutagenicity Cat 1B, Carcinogenicity Cat 1B, Reproductive Cat 2
Butyl Alcohol	<1%	78-92-2	201-158-5	Flammable Liquid Category 3, Eye Irritant Category 2, STOT SE 3 (Respiratory system / Drowsiness)
Balance of other ingredients is less than 1% in concentration (or 0.1% for carcinogens, reproductive toxins, germ cell mutagens, or sensitizers). Actual concentrations are withheld as trade secret.				

4. FIRST-AID MEASURES

4.1 DESCRIPTION OF FIRST AID MEASURES:

EYE CONTACT: If product enters the eyes, open eyes while under gentle running water for at least 15 minutes. Seek medical attention if irritation persists.

SKIN CONTACT: Wash skin thoroughly with soap and water after handling. Seek medical attention if irritation develops and persists.

INHALATION: If breathing becomes difficult, remove victim to fresh air. If necessary, use artificial respiration to support vital functions. Seek medical attention.

INGESTION: If product is swallowed, call physician or poison control center for most current information. If professional advice is not available, do not induce vomiting. Never induce vomiting or give diluents (milk or water) to someone who is unconscious, having convulsions, or who cannot swallow. Seek medical advice. Take a copy of the label and/or SDS with the victim to the health professional.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Individuals with existing skin or respiratory conditions may be aggravated by exposure.

4.2 SYMPTOMS AND EFFECTS, BOTH ACUTE AND DELAYED:

Contact with eyes may cause irritation with redness and tearing. Prolonged skin exposure may cause mild irritation.

4.3 RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and eliminate overexposure.

5. FIRE-FIGHTING MEASURES

5.1 FIRE EXTINGUISHING MATERIALS:

Use fire extinguishing methods below:

<u>Water Spray:</u> No	<u>Carbon Dioxide:</u> Yes
<u>Foam:</u> Yes	<u>Dry Chemical:</u> Yes
<u>Halon:</u> Yes	<u>Other:</u> Any "C" Class

5.2 UNUSUAL FIRE AND EXPLOSION HAZARDS:

Closed containers may explode when exposed to extreme heat. Do not apply to hot surfaces.


Explosion Sensitivity to Mechanical Impact: No

Explosion Sensitivity to Static Discharge: No

5.3 SPECIAL FIRE-FIGHTING PROCEDURES:

Incipient fire responders should wear eye protection. Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment. Isolate materials not yet involved in the fire and protect personnel. Move containers from fire area if this can be done without risk; otherwise, cool with carefully applied water spray. If possible, prevent runoff water from entering storm drains, bodies of water, or other environmentally sensitive areas.

NFPA RATING SYSTEM

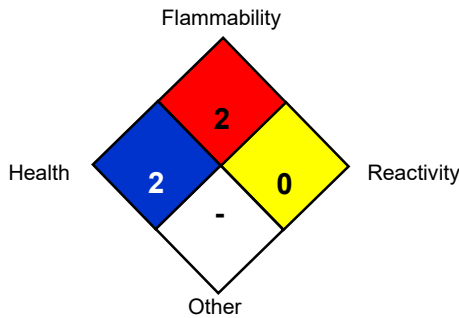

HMIS RATING SYSTEM

HAZARDOUS MATERIAL IDENTIFICATION SYSTEM			
HEALTH HAZARD (BLUE)	2		
FLAMMABILITY HAZARD (RED)	2		
PHYSICAL HAZARD (YELLOW)	0		
PROTECTIVE EQUIPMENT			
EYES	RESPIRATORY	HANDS	BODY
	See Sect 8		See Sect 8
For Routine Industrial Use and Handling Applications			

Hazard Scale: 0 = Minimal 1 = Slight 2 = Moderate 3 = Serious 4 = Severe * = Chronic hazard

6. ACCIDENTAL RELEASE MEASURES

6.1 PERSONAL PRECAUTIONS, PROTECTIVE EQUIPMENT AND EMERGENCY PROCEDURES:

See section 8.2 for Exposure Controls.

6.2 ENVIRONMENTAL PRECAUTIONS:

Keep spilled material out of all sewers and open bodies of water.

6.3 SPILL AND LEAK RESPONSE:

Stop the flow of material, if this can be done safely. Floor may be slippery; use care to avoid falling. Dike and contain the spill with inert material (sand, earth, fuller's earth, etc.) and if appropriate, transfer the liquid and solid dike material to containers for disposal. Remove contaminated clothing promptly and wash affected skin areas with soap and water. Wash clothing before reuse. Keep spill out of all sewers and open bodies of water. Dispose of in accordance with U.S. Federal, State, and local hazardous waste disposal regulations and those of Canada and its Provinces, those of Australia, Japan and EU Member States (see Section 13, Disposal Considerations).

7. HANDLING and STORAGE

7.1 PRECAUTIONS FOR SAFE HANDLING:

As with all chemicals, avoid getting this product ON YOU or IN YOU. Wash thoroughly after handling this product. Use good hygiene practices.

7.2 STORAGE AND HANDLING PRACTICES:

Store in original container. Keep container closed. Store in a cool, dry location. Avoid exposure to ignition sources and incompatible materials. Store below 100°F (37.5°C) Keep out of direct sunlight.

7.3 SPECIFIC USES:

See section 1.2 for details.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

8.1 EXPOSURE PARAMETERS:

Chemical Name	CAS#	ACGIH TLV	OSHA TWA
Modified Alkyd Resin	Proprietary	Not Listed	Not Listed
Dipropylene Glycol Methyl Ether Acetate	88917-22-0	Not Listed	Not Listed
n-Butyl Acetate	123-86-4	150 ppm	150 ppm
Propylene Glycol Monomethyl Ether Acetate	108-65-6	Not Listed	Not Listed
Aromatic Petroleum Distillate	64742-95-6	Not Listed	50 ppm
Butyl Alcohol	78-92-2	100 ppm	150 ppm

8.2 EXPOSURE CONTROLS:

VENTILATION AND ENGINEERING CONTROLS: Use with adequate ventilation to ensure exposure levels are maintained below the limits provided above.

The following information on appropriate Personal Protective Equipment is provided to assist employers in complying with OSHA regulations found in 29 CFR Subpart I (beginning at 1910.132) or equivalent standard of Canada, or standards of EU member states (including EN 149 for respiratory PPE, and EN 166 for face/eye protection), and those of Japan. Please reference applicable regulations and standards for relevant details.

RESPIRATORY PROTECTION: Maintain airborne contaminant concentrations below guidelines listed above. If necessary, use only respiratory protection authorized in the U.S. Federal OSHA Respiratory Protection Standard (29 CFR 1910.134), equivalent U.S. State standards, Canadian CSA Standard Z94.4-93, the European Standard EN149, or EU member states.

EYE PROTECTION: Safety glasses or chemical splash goggles are required to avoid contact. If necessary, refer to U.S. OSHA 29 CFR 1910.133, Canadian Standards, and the European Standard EN166, Australian Standards, or relevant Japanese Standards.

HAND PROTECTION: Chemical resistant gloves are required to prevent contact. If necessary, refer to U.S. OSHA 29 CFR 1910.138, the European Standard DIN EN 374, the appropriate Standards of Canada, Australian Standards, or relevant Japanese Standards.

BODY PROTECTION: Use as appropriate to prevent skin contact. If necessary, refer to appropriate Standards of Canada, or appropriate Standards of the EU, Australian Standards, or relevant Japanese Standards. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

9.1 INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES:

APPEARANCE (Physical State) and COLOR: This product is a red liquid with a slight ester-like odor.

ODOR: Slight

ODOR THRESHOLD: Not Available

pH: Not Applicable

MELTING/FREEZING POINT: Not Available

BOILING POINT: Not Available

FLASH POINT: ~186°F (85°C)

EVAPORATION RATE (n-BuAc=1): Not Available

FLAMMABILITY (SOLID, GAS): Not Applicable

UPPER/LOWER FLAMMABILITY OR EXPLOSION LIMITS: Not Available

VAPOR PRESSURE (mm Hg @ 20°C (68°F): Not Available

VAPOR DENSITY: Heavier than air

RELATIVE DENSITY: Not Available

DENSITY: 9.19

SPECIFIC GRAVITY: Not Available

SOLUBILITY IN WATER: Insoluble

WEIGHT PER GALLON: Not Available

PARTITION COEFFICIENT (n-octanol/water): Not Available

AUTO-IGNITION TEMPERATURE: Not Available

DECOMPOSITION TEMPERATURE: Not Available

VISCOSITY: Not Available

VOC g/l / Lb/gal: 251

9.2 OTHER INFORMATION:

No additional information available

10. STABILITY and REACTIVITY

10.1 REACTIVITY:

This product is not reactive.

10.2 STABILITY:

Stable under conditions of normal storage and use.

10.3 POSSIBILITY OF HAZARDOUS REACTIONS:

Will not occur.

10.4 CONDITIONS TO AVOID:

Incompatible materials, excessive heat.

10.5 MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE:

Strong oxidizing agents.

10.6 HAZARDOUS DECOMPOSITION PRODUCTS:

Thermal decomposition products include Carbon dioxide, carbon monoxide and nitrogen oxides in varying quantities.

11. TOXICOLOGICAL INFORMATION

11.1 INFORMATION ON TOXICOLOGICAL EFFECTS:

TOXICITY DATA:

n-Butyl Acetate CAS# 123-86-4

Oral rat LD50: 14,130 mg/kg

Dipropylene Glycol Methyl Ether Acetate CAS# 88917-22-0

Oral LD50, Rabbit, 3620 mg/kg

Dermal LD50, Rabbit, 500 mg/kg

Inhalation LC50, Rat, >5240 mg/m³

SUSPECTED CANCER AGENT: Ingredients within this product are found on the following lists: FEDERAL OSHA Z LIST, NTP, IARC, or CAL/OSHA and therefore are considered to be, or suspected to be, cancer-causing agents by these agencies.

Ethylbenzene CAS# 100-41-4 (Aromatic 100)

IRRITANCY OF PRODUCT: This product may be irritating to skin, eyes or respiratory system

SENSITIZATION TO THE PRODUCT: This product is not considered a respiratory system and skin sensitizer.

REPRODUCTIVE TOXICITY INFORMATION: This product contains chemicals which are suspected to be a reproductive hazard.

MUTAGENICITY INFORMATION: This product contains chemicals which are reported to be germ cell mutagen hazards.

SPECIFIC TARGET ORGAN TOXICITY – SINGLE EXPOSURE: Inhalation may cause respiratory irritation.

SPECIFIC TARGET ORGAN TOXICITY – REPEATED EXPOSURE: Data not sufficient for classification.

12. ECOLOGICAL INFORMATION

12.1 TOXICITY:

Chemical Name

Aromatic 100
64742-95-6

Algae/aquatic plants

-

Fish

9.22: 96 h Oncorhynchus
mykiss mg/L LC50

Crustacea

6.14: 48 h Daphnia magna
mg/L EC50

12.2 PERSISTENCE AND DEGRADABILITY:

No specific data available on this product.

12.3 BIOACCUMULATIVE POTENTIAL:

No specific data available on this product.

12.4 MOBILITY IN SOIL:

No specific data available on this product.

12.5 RESULTS OF PBT AND vPvB ASSESSMENT:

No specific data available on this product

12.6 OTHER ADVERSE EFFECTS:

This product is not expected to cause significant harm to plants, animals or aquatic life.

ALL WORK PRACTICES MUST BE AIMED AT ELIMINATING ENVIRONMENTAL CONTAMINATION.

12.7 WATER ENDANGERMENT CLASS:

Not water endangering in accordance with EU Guideline 91/155-EWG.

12.8 SPECIFIC AVAILABLE COMPONENT INFORMATION:

No additional data available.

13. DISPOSAL CONSIDERATIONS

13.1 WASTE TREATMENT METHODS:

Waste disposal must be in accordance with appropriate U.S. Federal, State, and local regulations, those of Canada, Australia, EU Member States and Japan.

13.2 EU Waste Code:

Not determined

14. TRANSPORTATION INFORMATION

US DOT, IATA, IMO, ADR:

U.S. DEPARTMENT OF TRANSPORTATION (DOT) SHIPPING REGULATIONS: This product is classified (per 49 CFR 172.101) by the U.S. Department of Transportation, as follows.

NOTE: For domestic highway transportation within U.S. this product is “not regulated in containers of not more than 119 gallons” per 49CFR173.120.

BULK SHIPMENTS GREATER THAN 119 GALLONS:

<u>14.1 PROPER SHIPPING NAME:</u>	Paint
<u>14.2 HAZARD CLASS NUMBER and DESCRIPTION:</u>	Flammable Liquid Class 3
<u>14.3 UN IDENTIFICATION NUMBER:</u>	UN1263
<u>14.4 PACKING GROUP:</u>	PGIII
<u>14.5 DOT LABEL(S) REQUIRED:</u>	Flammable Liquid Class 3
<u>NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER:</u>	128
<u>RQ QUANTITY:</u>	None

14.6 MARINE POLLUTANT: None of the components of this product are designated by the Department of Transportation to be Marine Pollutants (49 CFR 172.101, Appendix B).

14.7 SPECIAL PRECAUTIONS FOR USER:

None

14.8 INTERNATIONAL TRANSPORTION:

INTERNATIONAL AIR TRANSPORT ASSOCIATION SHIPPING INFORMATION (IATA): This product is not considered as dangerous goods.

INTERNATIONAL MARITIME ORGANIZATION SHIPPING INFORMATION (IMO): This product is not considered as dangerous goods.

14.9 TRANSPORT IN BULK ACCORDING TO ANNEX II OF MARPOL 73/78 AND IBC CODE:

EUROPEAN AGREEMENT CONCERNING THE INTERNATIONAL CARRIAGE OF DANGEROUS GOODS BY ROAD (ADR): This product is considered by the United Nations Economic Commission for Europe to be dangerous goods.

15. REGULATORY INFORMATION

15.1 UNITED STATES REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: The components of this product are subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act.

SARA 313 Reporting: Butyl Alcohol CAS# 78-92-2 <1%

U.S. SARA THRESHOLD PLANNING QUANTITY: There are no specific Threshold Planning Quantities for the components of this product. The default Federal MSDS submission and inventory requirement filing threshold of 10,000 lbs (4,540 kg) therefore applies, per 40 CFR 370.20.

U.S. CERCLA REPORTABLE QUANTITY (RQ): None

U.S. TSCA INVENTORY STATUS: The components of this product are listed on the TSCA Inventory or are exempted from listing.

OTHER U.S. FEDERAL REGULATIONS: None

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): Ingredients within this product are on the Proposition 65 Lists.



WARNING! This product can expose you to chemicals such as Ethylbenzene which is known to the State of California to cause cancer. For more information, go to WWW.P65Warning.ca.gov.

15.2 CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: The components of this product are on the DSL Inventory, or are exempted from listing.

OTHER CANADIAN REGULATIONS: Not applicable.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the SDS contains all of the information required by those regulations.

CANADIAN WHMIS CLASSIFICATION and SYMBOLS: Complies with WHMIS 2015.

15.3 EUROPEAN ECONOMIC COMMUNITY INFORMATION:

This product does meet the definition of a hazardous substance or preparation as defined by the European Union Council Directives 67/548/EEC, 1999/45/EC, 1272/2008/EC and subsequent Directives.

See Section 2 for full Details

15.4 AUSTRALIAN INFORMATION FOR PRODUCT:

The components of this product are listed on the International Chemical Inventory list.

15.5 JAPANESE INFORMATION FOR PRODUCT:

JAPANESE MINISTER OF INTERNATIONAL TRADE AND INDUSTRY (MITI) STATUS:

The components of this product are not listed as Class I Specified Chemical Substances, Class II Specified Chemical Substances, or Designated Chemical Substances by the Japanese MITI.

15.6 MEXICO REGULATIONS:

HARMONIZED SYSTEM FOR THE IDENTIFICATION AND COMMUNICATION OF HAZARD AND RISKS FROM

HAZARDOUS CHEMICALS IN THE WORKPLACE: This product has been classified per NOM-018-STPS-2015.

15.7 INTERNATIONAL CHEMICAL INVENTORIES:

Listing of the components on individual country Chemical Inventories is as follows:

Asia-Pac: Listed

Australian Inventory of Chemical Substances (AICS): Listed

Korean Existing Chemicals List (ECL): Listed

Japanese Existing National Inventory of Chemical Substances (ENCS): Listed

Philippines Inventory of Chemicals and Chemical Substances (PICCS): Listed

Swiss Giftliste List of Toxic Substances: Listed

U.S. TSCA: Listed

16. OTHER INFORMATION

PREPARED BY: Chris Eigbrett – (MSDS to GHS Compliance)

DATE OF PRINTING: February 17, 2021

The information contained herein is believed to be accurate but is not warranted to be so. Data and calculations are based on information furnished by the manufacturer of the product and manufacturers of the components of the product. Users are advised to confirm in advance of the need that information is current, applicable and suited to the circumstances of use. Florock Polymer Flooring assumes no responsibility for injury to vendee or third party person proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Furthermore, Florock Polymer Flooring assumes no responsibility for injury caused by abnormal use of this material even if reasonable safety procedures are followed.

END OF SDS SHEET