

Florock®

FloroThane & FloroWear

High Performance Urethane Flooring



EXCELLENCE IN POLYMER FLOORING




Florock®

FloroThane & FloroWear High Performance Urethanes

Whether applied as a topcoat over a Florock primer or as a hard-wearing finish coat over a variety of other Florock systems, FloroThane and FloroWear furnish industry-leading protection to concrete floors in high use commercial, industrial, and institutional environments.

- Military and Civil Aerospace Hangars
- Vehicle Maintenance Facilities
- Healthcare, Biotech, Laboratories
- Manufacturing and Logistics
- Retail, Grocery Stores, Hospitality
- Food and Beverage Processing
- Veterinary Clinics, Kennels
- Education, Museums, Stadiums

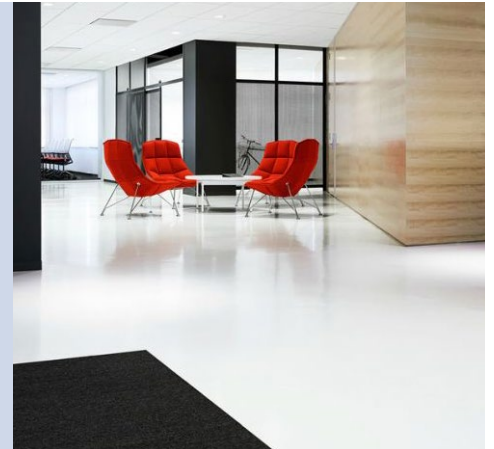

Excellent Performance

- Outstanding chemical and stain resistance
- Withstands thermal shock, temperature cycling
- Excellent abrasion resistance
- UV resistant, great color retention
- Moisture mitigating primers available*

Installation Advantages

- Field-tintable with Florock Colorants
- Available with different sheen levels
- Applied using roller and roller pan**

Health and Safety Benefits

- Choice of slip-resistant textures
- High solids and low V.O.C.
- Low odor installation options available
- USDA, FDA, EPA, OSHA and ADA compliant
- Contributes to LEED® Green Building credits

Simple Maintenance

- Easy and economical to clean and sanitize
- No stripping, waxing or polishing needed
- Pressure sprayable, power washable

* See FloroProof System data for MVT testing and details.

** See technical data sheet for roller specifications and handling. Product is not to be spray applied.


FloroThane & FloroWear

Chemical Resistant Urethane - CRU

FloroThane MC High Gloss

Outstanding Protection and Performance

Traditional aliphatic, two-component moisture curing urethane has a very high solids content. Glossy finish reflects overhead lighting and helps improve room visibility. May be roller-applied at 3 mils DFT per coat over a FloroPoxy Primer or as a finish coat over other Florock Systems. One to two coats recommended, with thorough sanding between applications. If desired, field tint with Florock Colorant in choice of standard or custom colors. For added slip-resistance, incorporate choice of approved aggregate into the final coat.

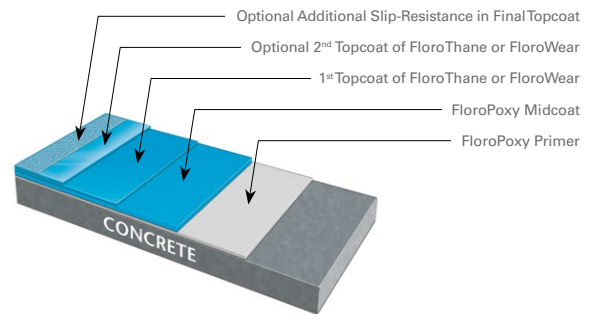


Standard FloroThane / FloroWear System

Shown as pigmented; may also be installed as a clear system

FloroThane MC/HT High Gloss or Satin

Exceptional Stain Resistance and No Odor

Next generation aliphatic, two-component moisture cure urethane in Clear boasts very high solids and no detectable odor during installation. Cures to an impermeable film with excellent chemical and stain resistance, including short-term Betadine® stain resistance. Choice of sheen level – light reflective, high gloss or add special powder for a satin finish. May be roller-applied at 3 mils DFT per coat over a FloroPoxy Primer or as a finish coat over other Florock Systems. One to two coats recommended, with thorough sanding between applications. If desired, field tint with Florock Colorant in choice of standard or custom colors. For added slip-resistance, incorporate choice of approved aggregate into the final coat.

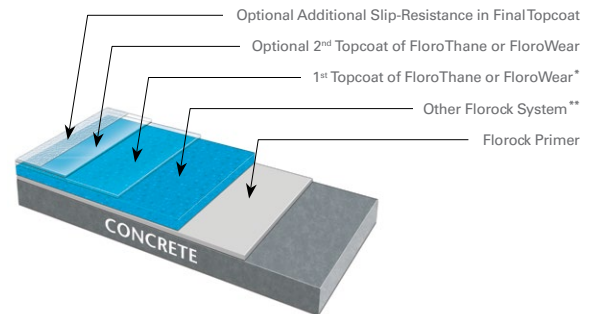

FloroThane / FloroWear as Topcoat(s) Over Other Florock Systems

Topcoat(s) shown in Clear; may also be installed with pigmented finish coat(s)

FloroWear Satin

Extraordinary Abrasion Resistance

High solids, aliphatic, two-component moisture curing urethane includes a fine aluminum oxide powder that imparts best-in-class abrasion resistance and wear properties. Satin finish has a cleanable, fine pumice-like texture. May be roller-applied at 3 mils DFT per coat over a FloroPoxy Primer or as a finish coat over other Florock Systems. One or two coats recommended. If desired, field tint with Florock Colorant in choice of standard or custom colors. Cured surface is slip-resistant. For additional slip-resistance, incorporate choice of approved aggregate into the finish.

* Clear topcoats are installed over decorative Florock Systems. Pigmented topcoats may be installed over solid colored Florock Systems.

** This is a simple representation. A variety of Florock decorative and industrial flooring systems may be used. These may be comprised of several different layers of coating, include aggregate or decorative elements, and be of any thickness up to approximately 375 mils (3/8-inch) (9.5 mm).



Standard Blue




Safety Yellow



Bright Red



Green



Black



White



Sand Beige



Assembly Blue



Tile Red




Standard Grey



White Knight Grey



Smoke Blue



Light Grey

Because the limitations of process printing do not allow accurate color reproductions, the samples shown in this brochure are only close approximations and should not be used for specification purposes. Cured flooring samples provide the best guide for final color selection and are available upon request. Please consult your Florock professional for custom colors.

FLOROTHANE-FLOROWEAR-BROCHURE-08-21-EN

EXCELLENCE IN POLYMER FLOORING

1120 W. Exchange Avenue Chicago, IL 60609 USA
sales@florock.net www.florock.net 1-800-FLOROCK 773-376-7132